wedi pool structure

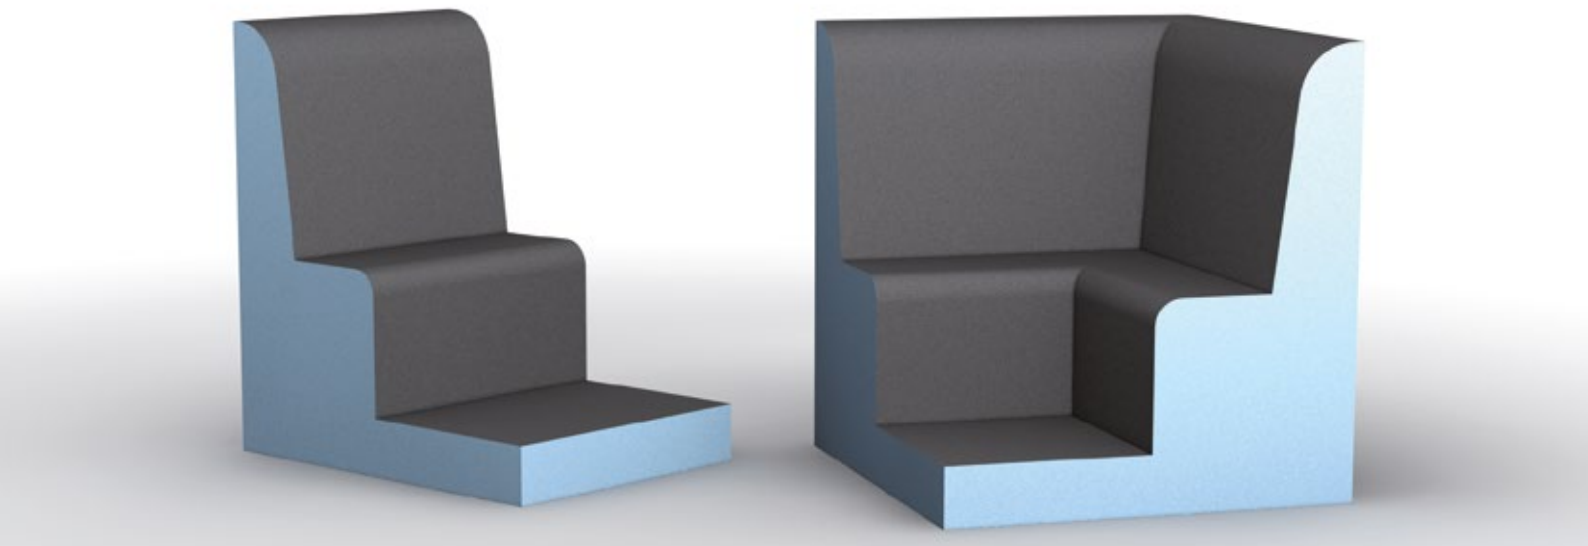

...wedi

...wedi
320

epoxy tile
adhesive

...wedi



1

The pool structure requires an even base with adequate load bearing capacity. Carefully check, clean and if required prime this base. Uneven bases can be levelled with screed or a self-levelling compound. If a height adjustment is required on even surfaces, then this can be achieved by using wedi building boards or other suitable construction materials.

2

The wedi elements and, if applicable, the wedi substructure are glued to the surface with wedi 320 tile adhesive (C2 TE S1 compliant with DIN EN 12004).

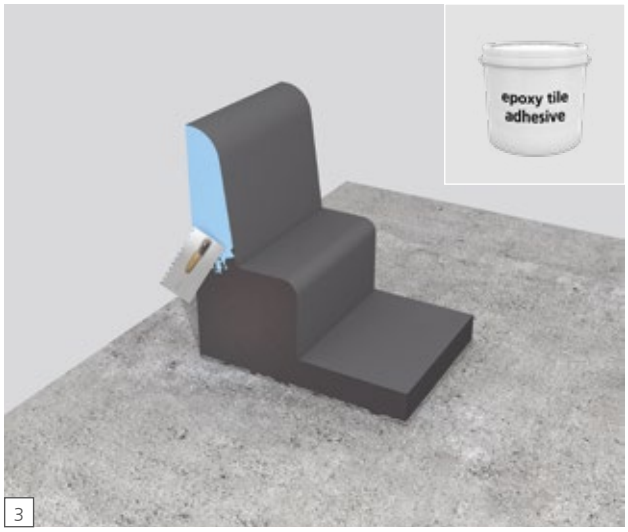

3

The wedi elements are glued fully to each other with epoxy resin adhesive.

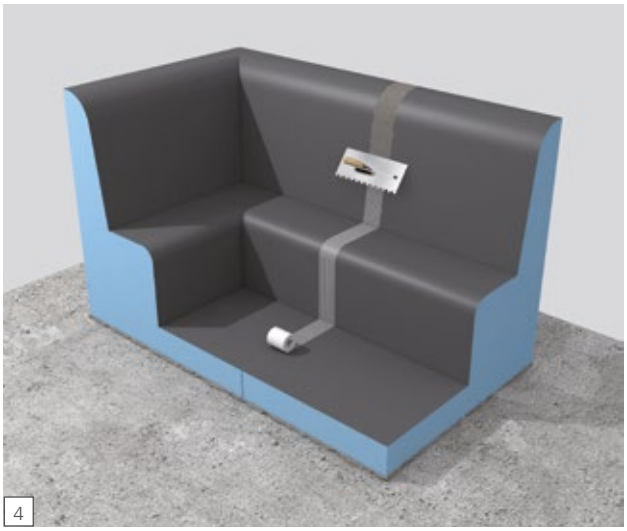

4

All joints are to be reinforced with wedi Tools reinforcement tape self-adhesive and wedi 320.

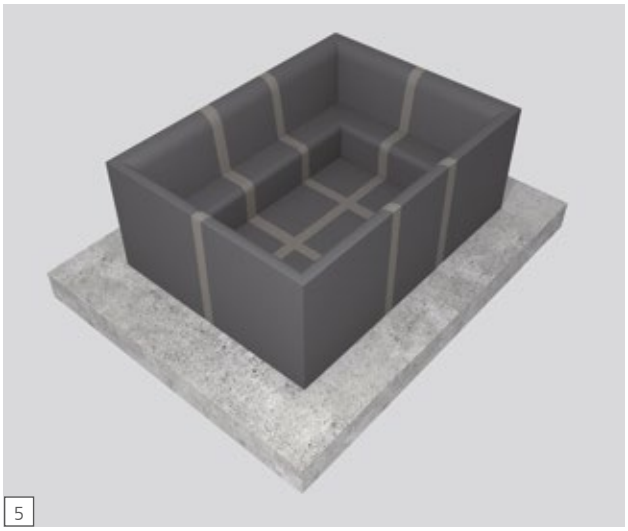

5

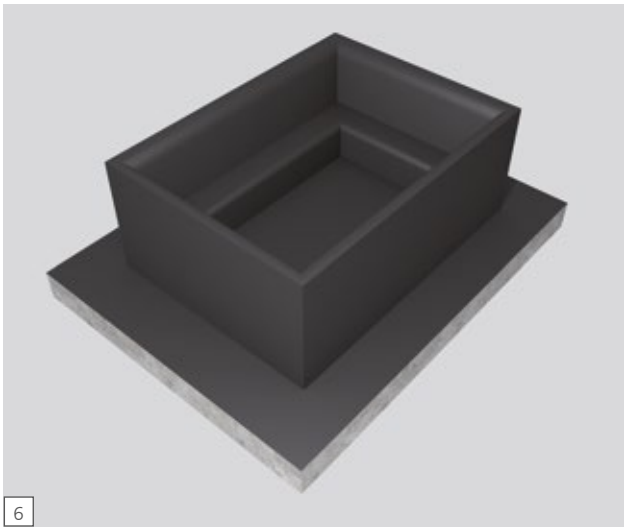

6

Once the pool structure has been completed, the complete surface is to be sealed with a suitable sealing system. The sealing system for this application needs to be recommended by the sealant manufacturer and applied in accordance with their recommendations.

wedi GmbH
Hollefeldstraße 51
48282 Emsdetten
Germany

Telephone +49 2572 156-0
Telefax +49 2572 156-133

info@wedi.de
www.wedi.eu

AEBABC Technische Änderungen vorbehalten. Subject to technical modifications. Sous réserve de modifications techniques.